

# Malware Analysis TIPS AND TRICKS

DFPS\_FOR610\_v11\_09-22

Uncovering the capabilities of malicious software allows security professionals to respond to incidents, fortify defenses, and derive threat intelligence. The malware analysis tips and tricks outlined in this poster act as a starting point and a reminder for the individuals looking to reverse-engineer and otherwise examine suspicious files such as compiled executables and potentially malicious documents.

What threat does the malicious or suspicious artifact pose? What do its mechanics reveal about the adversary's goals and capabilities? How effective are the company's security controls against such infections? What security measures can strengthen the infrastructure from future attacks of this nature? Malware analysis helps answer such questions critical to an organization's ability to handle malware threats and related incidents.

This poster brings together malware analysis resources related to:


- The overall process to examining malicious software in a controlled lab environment
- Using the REMnux® toolkit for analyzing malicious software using Linux-based tools
- Taking a closer look at malicious software by reversing it at the code level
- Analyzing malicious documents, including Microsoft Office and PDF files

To learn more about this topic, consider the following SANS courses:

- FOR610: Reverse-Engineering Malware: Malware Analysis Tools and Techniques ([sans.org/for610](https://sans.org/for610))
- FOR710: Reverse-Engineering Malware: Advanced Code Analysis ([sans.org/for710](https://sans.org/for710))

For additional learning resources, follow along the practical malware analysis videos from SANS authors and instructors, available for free at [for610.com/start-malware-analysis](https://for610.com/start-malware-analysis).

## What to Include in Your Malware Analysis Report?

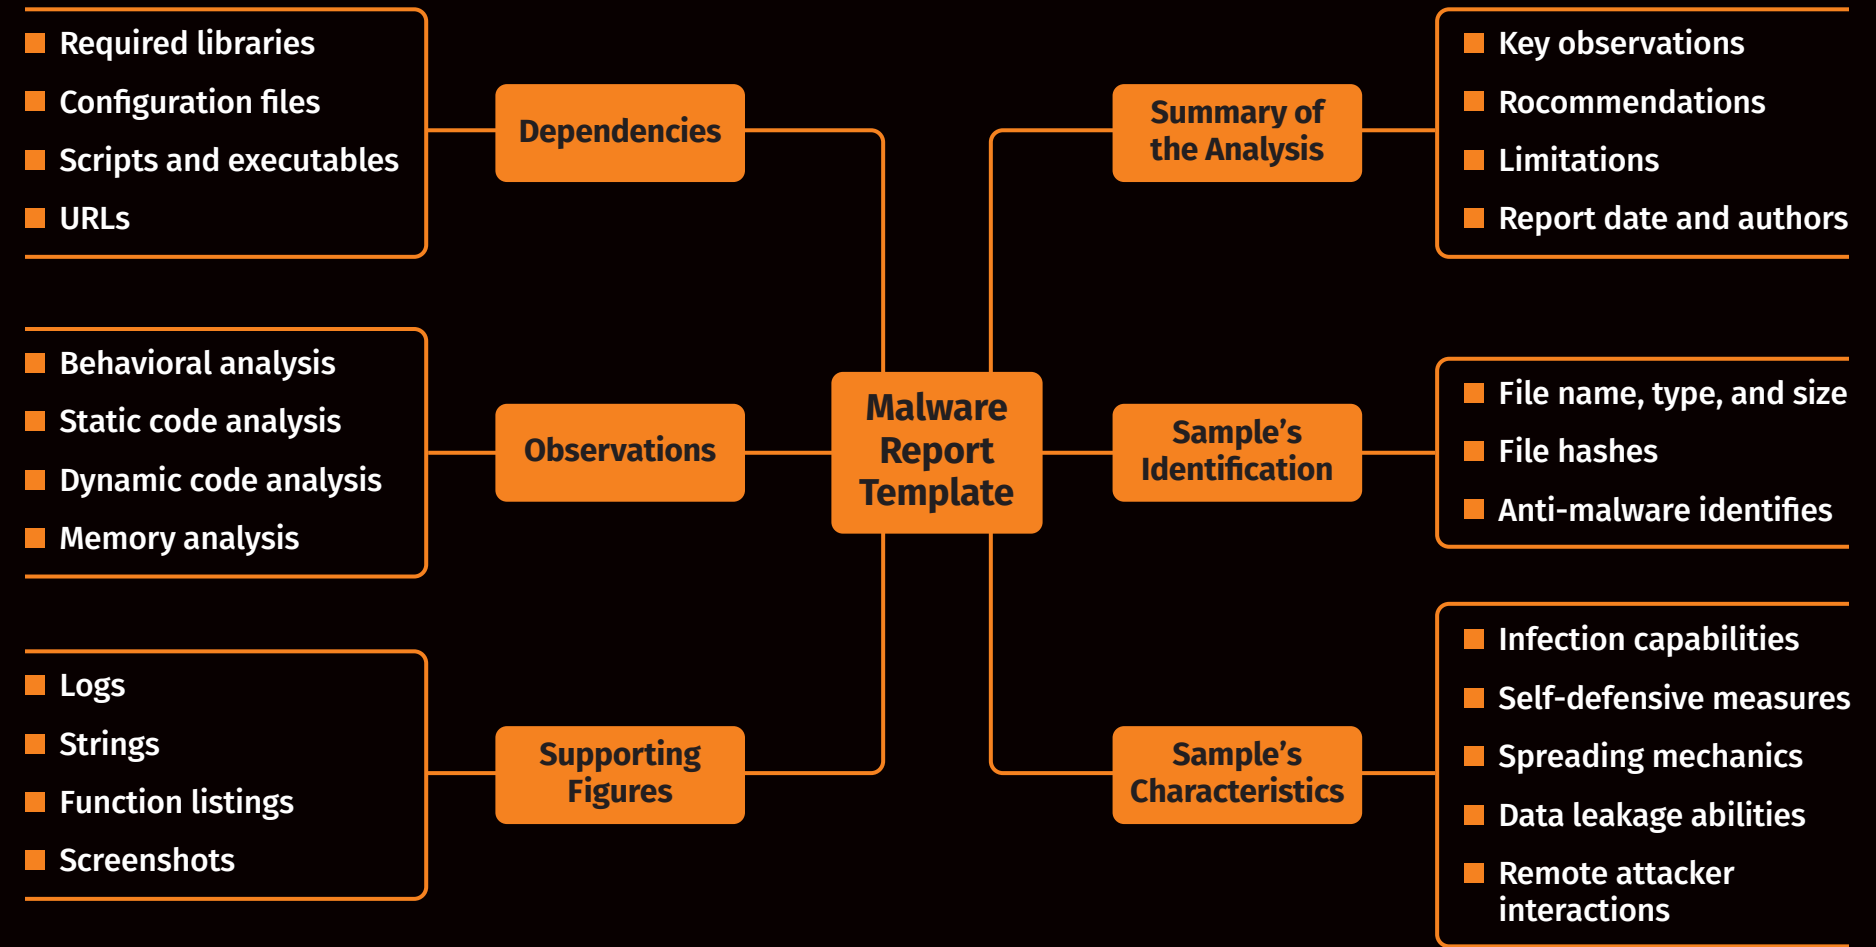


A typical malware analysis report covers the following areas:

- **Summary of the analysis:** Key takeaways the reader should get from the report regarding the specimen's nature, origin, capabilities, and other relevant characteristics
- **Identification:** The type of the file, its name, size, hashes (such as SHA256 and imphash), malware names (if known), current anti-virus detection capabilities
- **Characteristics:** The specimen's capabilities for infecting files, self-preservation, spreading, leaking data, interacting with the attacker, and so on; for a good reference of what characteristics you may need, take a look at the MAEC Malware Capabilities project or the alternative effort Malware Behavior Catalog (MBC)
- **Dependencies:** Files and network resources related to the specimen's functionality, such as supported OS versions and required initialization files, custom DLLs, executables, URLs, and scripts
- **Behavioral and code analysis findings:** Overview of the analyst's behavioral, as well as static and dynamic code analysis observations
- **Supporting figures:** Logs, screenshots, string excerpts, function listings, and other exhibits that support the investigators analysis
- **Incident recommendations:** Indicators for detecting the specimen on other systems and networks (a.k.a. indicators of compromise or IOCs), and possible for eradication steps

For downloadable malware analysis report templates, see [for610.com/report-mindmap](https://for610.com/report-mindmap) and [for610.com/report-template](https://for610.com/report-template).

## Stages of Malware Analysis

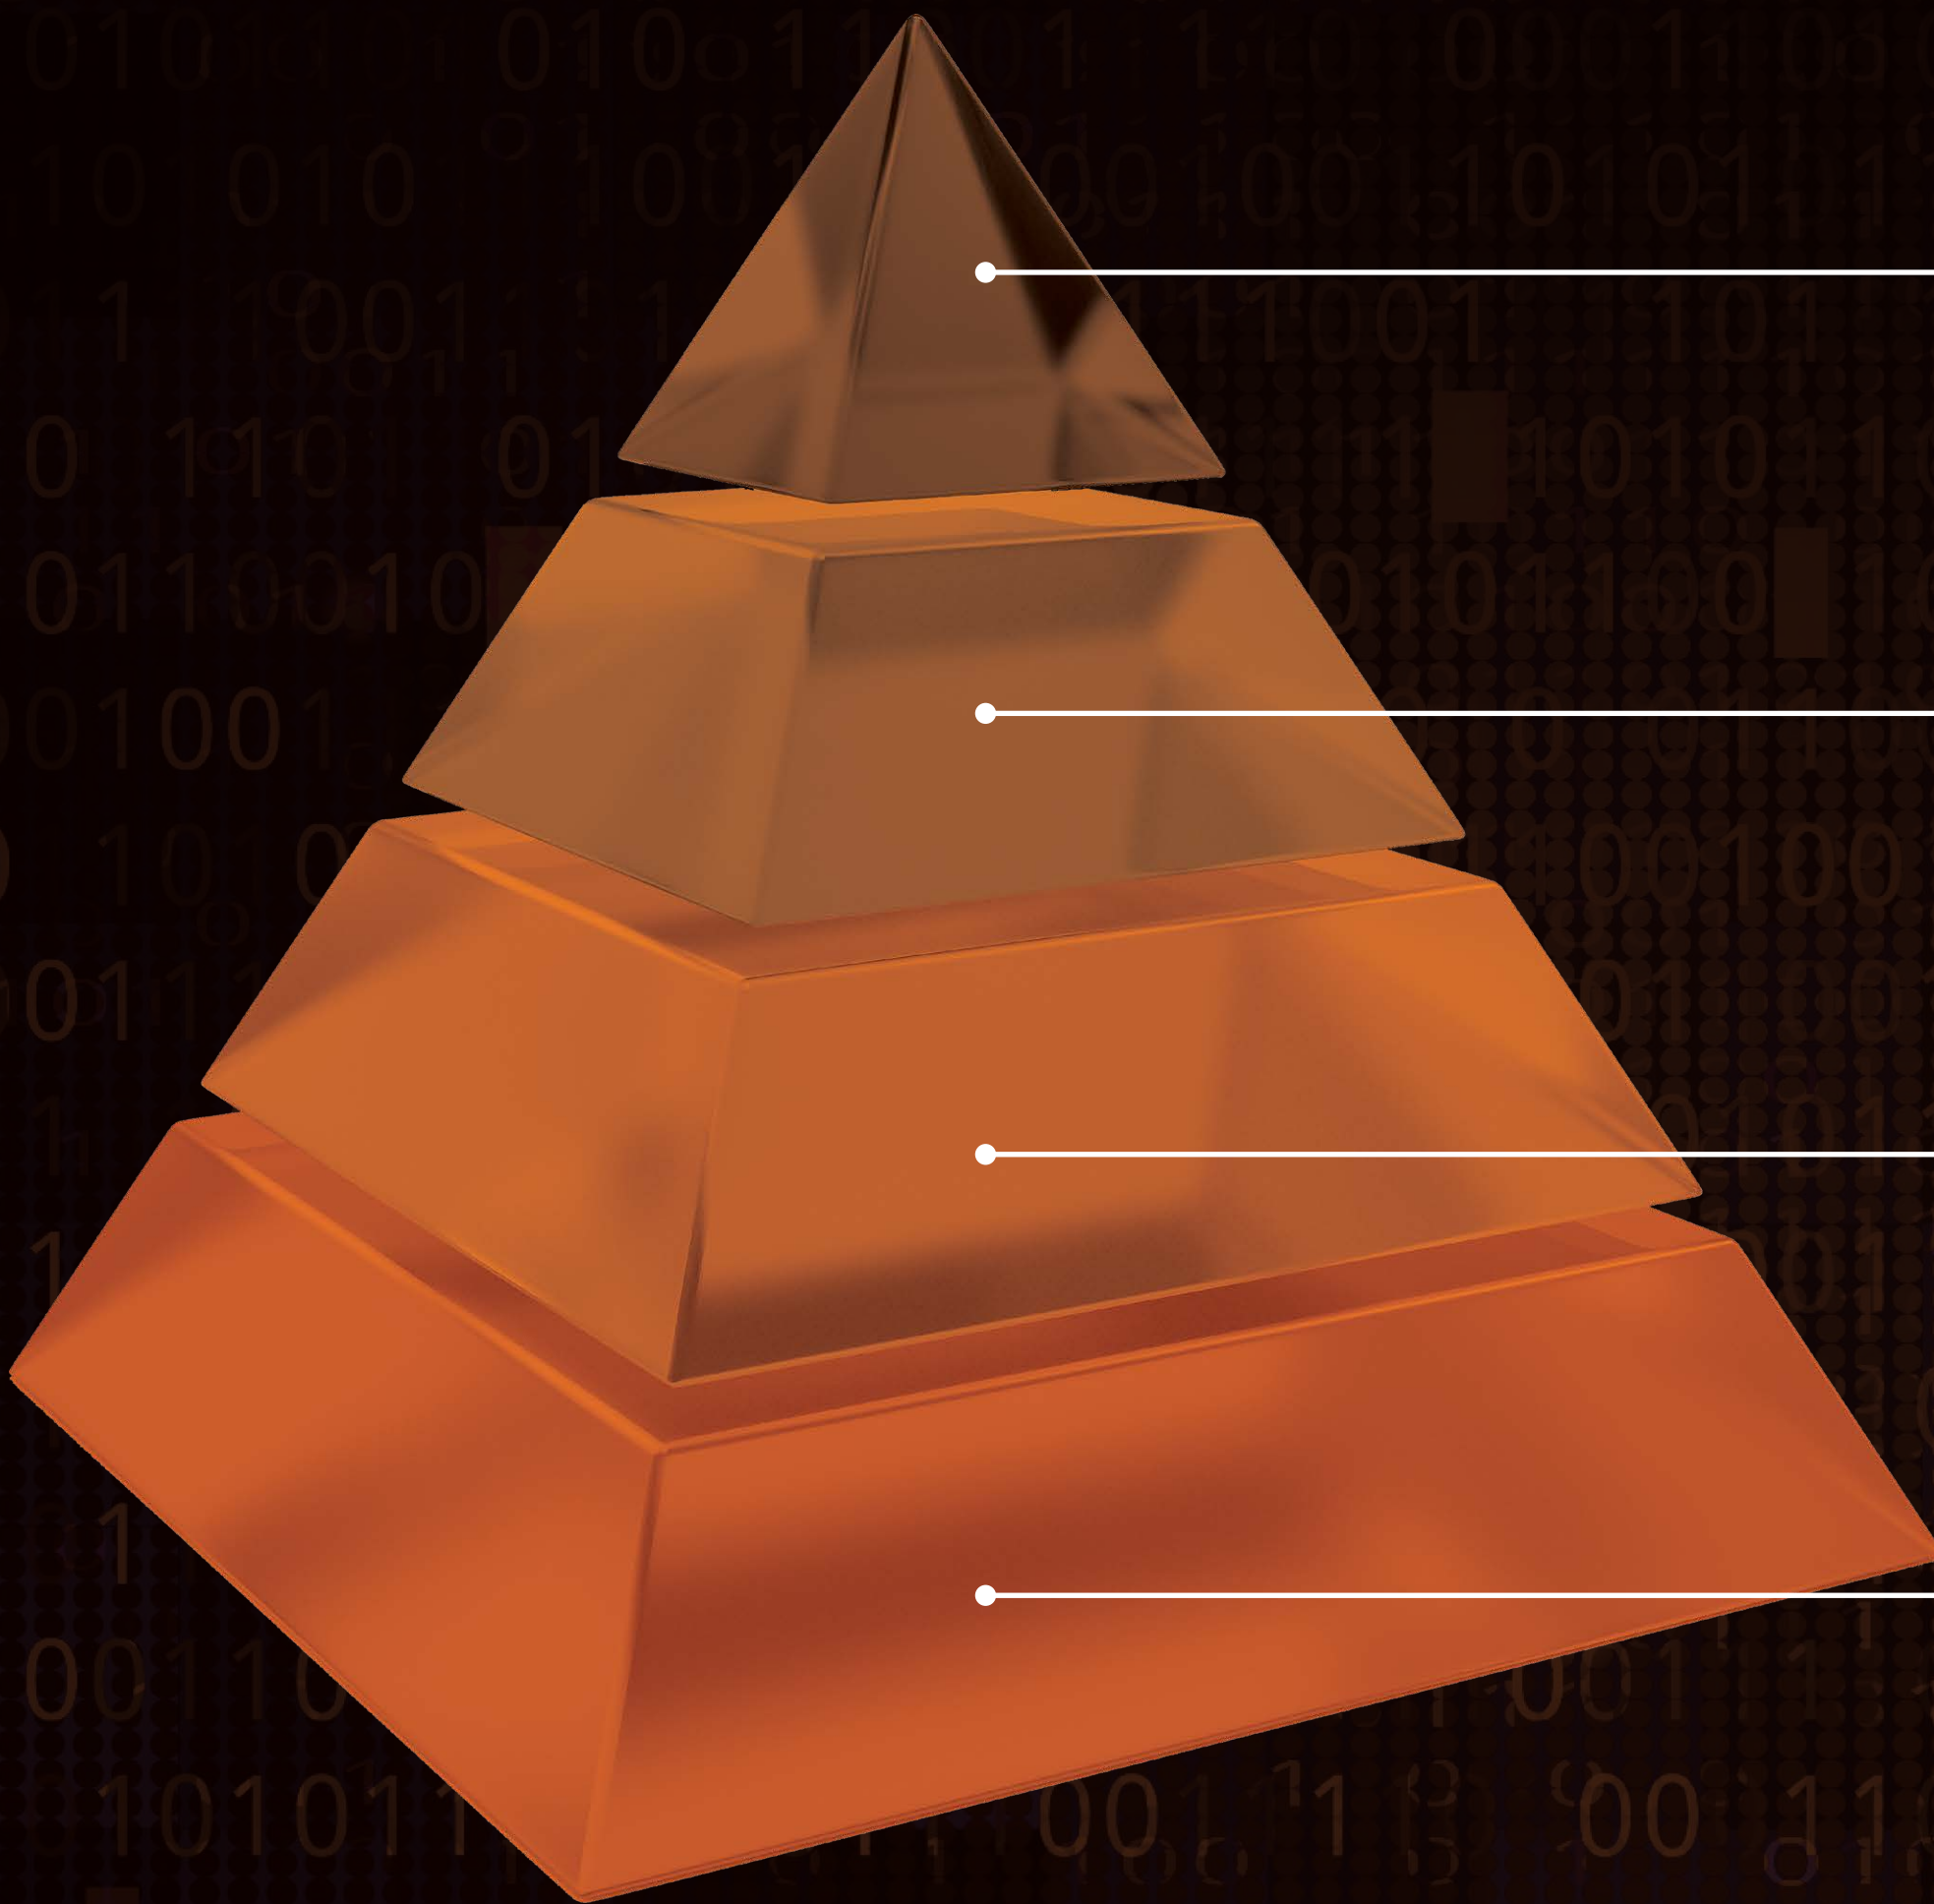

### Manual Code Reversing

Reverse-engineering the code that comprises the specimen can add valuable insights to the findings available after completing interactive behavior analysis. Some characteristics of the specimen are simply impractical to examine without examining the code. Code-level analysis often involves unpacking the specimen, deciding any data the malware author may have concealed, understanding the capabilities that didn't exhibit themselves during behavior analysis.

### Interactive Behavior Analysis

Interactive behavior analysis involves examining how sample runs in the lab that's under the analyst's full control to go beyond what a fully automated approach might produce. This stage involves examining registry, filesystem, process, network, and memory activities. It is especially fruitful when the researcher interacts with the malicious program, rather than passively observing the specimen.

### Static Properties Analysis

Analysts might proceed with examining the malware specimen by looking at its static properties, which are sometimes called metadata. This process entails examining the strings embedded into the file, its overall structure, and header data, without actually running the malicious program. This stage helps the analyst decide what aspects of the specimen, if any, are worth examining more closely.

### Fully Automated Analysis

The easiest way to begin learning about a malware specimen is to examine it using fully automated tools. Sometimes called analysis sandboxes, these they're designed to assess what the specimen might do if it ran on a system. They might not provide as much insight as a human analyst would. However, they can handle vast amounts of malware, allowing the analyst to focus on the specimens that truly require her attention.

The process of analyzing malicious software involves several stages, which can be listed in the order of increasing complexity. Though it's convenient to group malware analysis tasks into discrete stages, the tasks are often intertwined, with the insights gathered in one stage informing efforts conducted in another. The pyramid diagram above, based in part on the experiences of security professional Alissa Torres, presents one such ranking.



Overview of the Malware Analysis Process

- Use **automated analysis sandbox** tools for an initial assessment of the suspicious file.
- Set up a **controlled, isolated laboratory** in which to examine the malware specimen.
- Examine static properties and meta-data of the specimen for triage and early theories.
- Emulate code execution to identify malicious capabilities and contemplate next steps.
- Perform behavioral analysis to examine the specimen's interactions with its environment.
- Analyze relevant aspects of the code statically with a disassembler and decompiler.
- Perform dynamic code analysis to understand the more difficult aspects of the code.
- If necessary, unpack the specimen.
- Repeat steps 4-8 above as necessary (the order may vary) until analysis objectives are met.
- Augment your analysis using other methods, such as memory forensics and threat intel.
- Document findings**, save analysis artifacts and clean up the laboratory for future analysis.

Behavioral Analysis

Be ready to revert to good state via virtualization snapshots, **Clonezilla**, **dd**, **FOG**, **PXE booting**, etc.

Monitor local interactions (**Process Explorer**, **Process Monitor**, **ProcDOT**, **Noriben**).

Detect major local changes (**RegShot**, **Autoruns**).

Monitor network interactions (**Wireshark**, **Fiddler**).

Redirect network traffic (**fakedns**, **accept-all-ips**).

Activate services (**UNetSim** or actual services) requested by malware and reinfect the system.

Adjust the runtime environment for the specimen as it requests additional local or network resources.

Ghidra for Static Code Analysis

Go to specific destination ..... **g**

Show references to instruction ..... **Ctrl+Shift+f**

Insert a comment ..... **;**

Follow jump or call ..... **Enter**

Return to previous location ..... **Alt+Left**

Go to next location ..... **Alt+Right**

Undo ..... **Ctrl+z**

Define data type ..... **t**

Add a bookmark ..... **Ctrl+d**

Text search ..... **Ctrl+Shift+e**

Add or edit a label ..... **l**

Disassemble values ..... **d**

Authored by Lenny Zeltser, who is the CISO at **Axonius** and Faculty Fellow at **SANS Institute**. You can find him at **twitter.com/lennyzeltser** and **zeltser.com**. Download this and other Lenny's security cheat sheets from **zeltser.com/cheat-sheets**. Creative Commons v3 "Attribution" License for this cheat sheet version 2.2.

Getting Started with REMnux

- Get REMnux as a **virtual appliance**, install the distro on a **dedicated system**, or add it to an **existing one**.
- Review REMnux documentation at **docs.remnux.org**.
- Keep your system up to date** by periodically running "remnux upgrade" and "remnux update".
- Become familiar with REMnux malware analysis tools **available as Docker images**.
- Know default login credentials: remnux/malware

General Commands on REMnux

Shut down the system ..... **shutdown**

Reboot the system ..... **reboot**

Switch to a root shell ..... **sudo -s**

Renew DHCP lease ..... **renew-dhcp**

See current IP address ..... **myip**

Edit a text file ..... **code file**

View an image file ..... **feh file**

Start web server ..... **httdp start**

Start SSH server ..... **sshd start**

Analyze Windows Executables

**Static Properties:** analyze, peframe, pefile, exiftool, clamscan, pescan, portex, bearcommander, pecheck

**Strings and Deobfuscation:** pestr, bbrack, brxor.py, base64dump, xorsearch, flarestrings, floss, cyberchef

**Code Emulation:** binee, capa, vivbin

**Disassemble/Decompile:** ghidra, **cutter**, objdump, r2

**Unpacking:** bytehist, **de4dot**, upx

Reverse-Engineer Linux Binaries

**Static Properties:** trid, exiftool, pyew, **readelf.py**

**Disassemble/Decompile:** ghidra, **cutter**, objdump, r2

**Debugging:** edb, gdb

**Behavior Analysis:** ltrace, strace, frida, sysdig, **unhide**

Investigate Other Forms of Malicious Code

**Android:** apktool, droidlysis, androguipy, baksmali, **dex2jar**

**Java:** cfr, procyon, jad, jd-gui, **idx\_parser.py**

**Python:** **pyinstxtractor.py**, pycdc

**JavaScript:** js, **js-file**, **objects.js**, **box-js**

**Shellcode:** shellcode2exe.bat, scdbg, xorsearch

**PowerShell:** pwsh, **base64dump**

**Flash:** swfdump, flare, flasm, **swf\_mastah.py**, xxxswf

Authored by Lenny Zeltser for REMnux v7. Lenny writes a security blog at **zeltser.com** and is active on Twitter at @lennyzeltser. Many REMnux tools and techniques are discussed in the Reverse-Engineering Malware course at SANS Institute, which Lenny co-authored. This cheat sheet is distributed according to the **Creative Commons v3 "Attribution" License**.

Overview of the Code Analysis Process

- Examine static properties of the Windows executable for initial assessment and triage.
- Identify strings and API calls that highlight the program's suspicious or malicious capabilities.
- Perform automated and manual behavioral analysis to gather additional details.
- Emulate code execution to identify characteristics and areas for further analysis.
- Use a disassembler and decompiler to statically examine code related to risky strings and APIs.
- Use a debugger for dynamic analysis to examine how risky strings and API calls are used.
- If appropriate, unpack the code and its artifacts.
- As your understanding of the code increases, add comments, labels; rename functions, variables.
- Progress to examine the code that references or depends upon the code you've already analyzed.
- Repeat steps 5-9 above as necessary (the order may vary) until analysis objectives are met.

Common 32-Bit Registers and Uses

EAX      Addition, multiplication, function results

ECX      Counter; used by LOOP and others

EBP      Baseline/frame pointer for referencing function arguments (EBP+value) and local variables (EBP-value)

ESP      Points to the current "top" of the stack; changes via PUSH, POP, and others

EIP      Instruction pointer; points to the next instruction; shellcode gets it via call/pop

EFLAGS      Contains flags that store outcomes of computations (e.g., Zero and Carry flags)

FS      F segment register; FS[0] points to SEH chain, FS[0x30] points to the PEB.

Common x86 Assembly Instructions

**mov EAX, 0xB8**      Put the value 0xB8 in EAX.

**push EAX**      Put EAX contents on the stack.

**pop EAX**      Remove contents from top of the stack and put them in EAX .

**lea EAX, [EBP-4]**      Put the address of variable EBP-4 in EAX.

**call EAX**      Call the function whose address resides in the EAX register.

**add esp, 8**      Increase ESP by 8 to shrink the stack by two 4-byte arguments.

**sub esp, 0x54**      Shift ESP by 0x54 to make room on the stack for local variable(s).

**xor EAX, EAX**      Set EAX contents to zero.

**test EAX, EAX**      Check whether EAX contains zero, set the appropriate EFLAGS bits.

**cmp EAX, 0xB8**      Compare EAX to 0xB8, set the appropriate EFLAGS bits.

Authored by Lenny Zeltser (**zeltser.com**) with feedback from **Anuj Soni**. Malicious code analysis and related topics are covered in the SANS Institute course **FOR610: Reverse-Engineering Malware**, which they've co-authored. This cheat sheet, version 1.1 , is released under the **Creative Commons v3 "Attribution" License**. For additional reversing, security and IT tips, visit **zeltser.com/cheat-sheets**.

x64dbg/x32dbg for Dynamic Code Analysis

Run the code ..... **F9**

Step into/over instruction ..... **F7/F8**

Execute until selected instruction ..... **F4**

Execute until the next return ..... **Ctrl+F9**

Show previous/next executed instruction ..... **-/+**

Return to previous view ..... **\***

Go to specific expression ..... **Ctrl+g**

Insert comment/label ..... **:/**

Show current function as a graph ..... **g**

Find specific pattern ..... **Ctrl+b**

Set software breakpoint on specific instruction .. **Select instruction » F2**

Set software breakpoint on API ..... **Go to Command prompt » SetBPX API Name**

Highlight all occurrences of the keyword ..... **h » Click on keyword** in disassembler

Assemble instruction in place of selected one .. **Select instruction » Spacebar**

Edit data in memory or instruction opcode ... **Select data or instruction » Ctrl+e**

Extract API call references ..... **Right-click in disassembler » Search for » Current module » Intermodular calls**

Unpacking Malicious Code

Determine whether the specimen is packed by using **Detect It Easy**, **Exeinfo PE**, **Bytehist**, **peframe**, etc.

To try unpacking the specimen quickly, infect the lab system and dump from memory using **Scylla**.

For more precision, find the Original Entry Point (OEP) in a debugger and dump with **OillyDumpEx**.

To find the OEP, anticipate the condition close to the end of the unpacker and set the breakpoint.

Try setting a memory breakpoint on the stack in the unpacker's beginning to catch it during cleanup.

To get closer to the OEP, set breakpoints on APIs such as LoadLibrary, VirtualAlloc, etc.

To intercept process injection set breakpoints on VirtualAllocEx, WriteProcessMemory, etc.

If cannot dump cleanly, examine the packed specimen via dynamic code analysis while it runs.

Rebuild imports and other aspects of the dumped file using **Scylla**, Imports Fixer, and **pe\_unmapper**.

Bypassing Other Analysis Defenses

Decode obfuscated strings statically using **FLOSS**, **xorsearch**, **Balbuszard**, etc.

Decode data in a debugger by setting a breakpoint after the decoding function and examining results.

Conceal **x64dbg/x32dbg** via the **ScyllaHide** plugin.

To disable anti-analysis functionality, locate and patch the defensive code using a debugger.

Look out for tricky jumps via TLS, SEH, RET, CALL, etc. when stepping through the code in a debugger.

If analyzing shellcode, use **scdbg** and **runsc**.

Disable ASLR via **setdllcharacteristics**, **CFF Explorer**.

Understanding 64-Bit Registers

EAX → RAX, ECX → RCX, EBX → RBX, ESP → RSP, EIP → RIP

Additional 64-bit registers are R8-R15.

RSP is often used to access stack arguments and local variables, instead of EBP.

||||| R8 (64 bits)

||||| R9 (64 bits)

||||| R10 (64 bits)

||||| R11 (64 bits)

||||| R12 (64 bits)

||||| R13 (64 bits)

||||| R14 (64 bits)

||||| R15 (64 bits)

Passing Parameters to Functions

arg0      [EBP+8] on 32-bit, RCX on 64-bit

arg1      [EBP+0xC] on 32-bit, RDX on 64-bit

arg2      [EBP+0x10] on 32-bit, R8 on 64-bit

arg3      [EBP+0x14] on 32-bit, R9 on 64-bit

Decoding Conditional Jumps

**JA / JG**      Jump if above/jump if greater.

**JB / JL**      Jump if below/jump if less.

**JE / JZ**      Jump if equal; same as jump if zero.

**JNE / JNZ**      Jump if not equal; same as jump if not zero.

**JGE / JNL**      Jump if greater or equal; same as jump if not less.

Some Risky Windows API Calls

**Code injection:** CreateRemoteThread, OpenProcess, VirtualAllocEx, WriteProcessMemory, EnumProcesses

**Dynamic DLL loading:** LoadLibrary, GetProcAddress

**Memory scraping:** CreateToolhelp32Snapshot, OpenProcess, ReadProcessMemory, EnumProcesses

**Data stealing:** GetClipboardData, GetWindowText

**Keylogging:** GetAsyncKeyState, SetWindowsHookEx

**Embedded resources:** FindResource, LockResource

**Unpacking/self-injection:** VirtualAlloc, VirtualProtect

**Query artifacts:** CreateMutex, CreateFile, FindWindow, GetModuleHandle, RegOpenKeyEx

**Execute a program:** WinExec, ShellExecute, CreateProcess

**Web interactions:** InternetOpen, HttpOpenRequest, HttpSendRequest, InternetReadFile

Additional Code Analysis Tips

Be patient but persistent; focus on small, manageable code areas and expand from there.

Use dynamic code analysis (debugging) for code that's too difficult to understand statically.

Look at jumps and calls to assess how the specimen flows from "interesting" code block to the other.

If code analysis is taking too long, consider whether behavioral or memory analysis will achieve the goals.

When looking for API calls, know the official API names and the associated native APIs (Nt, Zw, Rtl).

General Approach to Document Analysis

- Examine the document for anomalies, such as risky tags, scripts, and embedded artifacts.
- Locate embedded code, such as shellcode, macros, JavaScript, or other suspicious objects.
- Extract suspicious code or objects from the file.
- If relevant, deobfuscate and examine macros, JavaScript, or other embedded code.
- If relevant, emulate, disassemble and/or debug shellcode that you extracted from the document.
- Understand the next steps in the infection chain.

Microsoft Office Format Notes

Binary Microsoft Office document files (.doc, .xls, etc.) use the OLE2 (a.k.a. Structured Storage) format.

SRP streams in OLE2 documents sometimes store a cached version of earlier **VBA macro code**.

OOXML document files (.docx, .xlsx, etc.) supported by Microsoft Office are compressed zip archives.

VBA macros in OOXML documents are stored inside an OLE2 binary file, which is within the zip archive.

Excel supports XLM macros that are embedded as formulas in sheets without the OLE2 binary file.

RTF documents don't support macros but can contain malicious embedded files and objects.

Useful MS Office File Analysis Commands

**zipdump.py file.pptx**      Examine contents of OOXML file **file.pptx**.

**zipdump.py file.pptx -s 3 -d**      Extract file with index 3 from **file.pptx** to STDOUT.

**olevba.py file.xlsm**      Locate and extract macros from **file.xlsm**.

**oledump.py file.xls -s 3 -v**      Extract VBA source code from stream 3 in **file.xls**.

**xmldump.py pretty**      Format XML file supplied via STDIN for easier analysis.

**oledump.py file.xls -p plugin http\_heuristics**      Find obfuscated URLs in **file.xls** macros.

**vmonkey file.doc**      Emulate the execution of macros in **file.doc** to analyze them.

**evilclippy -uu file.ppt**      Remove the password prompt from macros in **file.ppt**.

**msoffcrypto-tool infile.docm outfile.docm -p**      Decrypt **outfile.docm** using specified password to create **outfile.docm**.

**poodedmp file.doc**      Disassemble VBA-stomped p-code macro from **file.doc**.

**pcode2code file.doc**      Decompile VBA-stomped p-code macro from **file.doc**.

**rtfobj.py file.rtf**      Extract objects embedded into RTF **file.rtf**.

**rtfdump.py file.rtf**      List groups and structure of RTF **file.rtf**.

**rtfdump.py file.rtf -o**      Examine objects in RTF file **file.rtf**.

**rtfdump.py file.rtf file.doc**      Extract hex contents from group in RTF **file.rtf**.

**xlmdoobfuscator --file file.xlsm**      Deobfuscate XLM (Excel 4) macros in **file.xlsm**.

Examine Suspicious Documents

**Microsoft Office Files:** vmonkey, pcodedmp, olevba, xlmdoobfuscator, oledump.py, msoffice-crypt, ssviwe

**RTF Files:** rtfobj, rtfdump

**Email Messages:** emldump, msgconvert

**PDF Files:** pdfdid, pdfparser, pdfextract, pdfdecrypt, peepdf, pdftk, pdfresurrect, qpdf, pdfobjflow

**General:** **base64dump**, **tesseract**, exiftool

Explore Network Interactions

**Monitoring:** burpsuite, networkminer, polarproxy, mitmproxy, wireshark, tshark, ngrep, tcptract

**Connecting:** **thug**, nc, **tor**, **wget**, **curl**, **irc**, ssh, **unfurl**

**Services:** fakedns, fakemail, **accept-all-ips**, nc, **httpd**, inetsim, fakenet, sshd, myip

Gather and Analyze Data

**Network:** Automater.py, shodan, **ipwhois\_cli.py**, pdnstooll

**Hashes:** **malwoverview.py**, nsrllookup, **Automater.py**, **vt\_virustotal-search.py**

**Files:** yara, **scalpel**, bulk\_extractor, ioc\_writer

**Other:** dextray, **viper**, **time-decode.py**

Other Analysis Tasks

**Memory Forensics:** vol.py, vol3, **linux\_mem\_diff.py**, aeskeyfind, rsakeyfind, bulk\_extractor

**File Editing:** wxHexEditor, scite, **code**, xpdf, **convert**

**File Extraction:** **7z**, **unzip**, unrar, cabextract

Use Docker Containers for Analysis

**Thug Honeyclient:** remnux/thug

**JSDetox JavaScript Analysis:** remnux/jsdetox

**Rekall Memory Forensics:** remnux/rekall

**RetDec Decompiler:** remnux/retdec

**Radare2 Reversing Framework:** remnux/radare2

**Ciphey Automatic Decrypter:** remnux/ciphey

**Viper Binary Analysis Framework:** remnux/viper

**REMnux in a Container:** remnux/remnux-distro

Interact with Docker Images

List local images ..... **docker images**

Update local image ..... **docker pull image**

Delete local image ..... **docker rmi imageid**

Delete unused resources .... **docker system prune**

Open a shell inside a ..... **docker run --rm -it image bash** transient container

Map a local TCP port 80 to ... **docker run --rm -it -p 80:80** container's port 80 **image bash**

Map your current directory ... **docker run --rm -it -v .:dir** into container **image bash**

Authored by Lenny Zeltser for REMnux v7. Lenny writes a security blog at **zeltser.com** and is active on Twitter at @lennyzeltser. Many REMnux tools and techniques are discussed in the Reverse-Engineering Malware course at SANS Institute, which Lenny co-authored. This cheat sheet is distributed according to the **Creative Commons v3 "Attribution" License**.

SANS DFIR CURRICULUM

OPERATING SYSTEM & DEVICE IN-DEPTH



**FOR308**  
Digital Forensics Essentials



**FOR498**  
Battlefield Forensics & Data Acquisition  
GBFA



**FOR500**  
Windows Forensic Analysis  
GCFE



**FOR518**  
Mac and iOS Forensic Analysis & Incident Response  
GIME



**FOR585**  
Smartphone Forensic Analysis In-Depth  
GASF



**FOR508**  
Advanced Incident Response, Threat Hunting & Digital Forensics  
GCFA



**FOR509**  
Enterprise Cloud Forensics & Incident Response  
GCFR

INCIDENT RESPONSE & THREAT HUNTING



**FOR528**  
Ransomware for Incident Responders



**FOR572**  
Advanced Network Forensics: Threat Hunting, Analysis & Incident Response  
GNFA



**FOR578**  
Cyber Threat Intelligence  
GCTI



**FOR608**  
Enterprise-Class Incident Response & Threat Hunting



**FOR610**  
REM: Malware Analysis Tools & Techniques  
GREM



**FOR710**  
Reverse-Engineering Malware: Advanced Code Analysis



**SEC504**  
Hacker Tools, Techniques & Incident Handling  
GCIH